

---

## Product description

---

The virtual in-house telephone assumes the functions of a video indoor station as the client software on a Windows PC or a Windows-based control panel in conjunction with the Smart Gateway.

### Performance features:

- Control directly at the monitor by mouse click or fingertip pressure
- Two display modes: window and widget view
- Audio and video door communication
- Camera surveillance
- Video memory
- Direct door dialling from list
- Receive group calls
- Switching and control functions (e.g. for door release and light switching)
- One free BLC 250-0 user licence is required for the integration.
- CTI door call: Audio transmission via the telephone network in parallel with video signal over Ethernet possible, ensuring an audio link in optimum TC quality

### Minimum system requirements:



- Microsoft® Windows 8.1, Windows 8.1 Pro/Enterprise - (32/64 Bit)
- Microsoft® Windows 10 Home/Pro/Enterprise - (32/64 Bit)
- At least Microsoft® DirectX® 9.0c
- CPU: Dual-Core from 2.0 GHz
- At least 2 GB RAM
- Graphics card with at least 1024 x 768 pixel, at least full support for DirectX® 9.0c / Direct3D® 9
- Ethernet card/Network connection: 100 Mbit
- Sound card with connected headset/loudspeaker and microphone (depending on operating mode; a headset/loudspeaker is always required on the computer for signalling a storey call acoustically)


---

## Article information

---

Article designation	Article description	Colour/Material	KGSAF article no.
BSHT 650-0	Bus software in-house telephone	Others	0 200042633-01

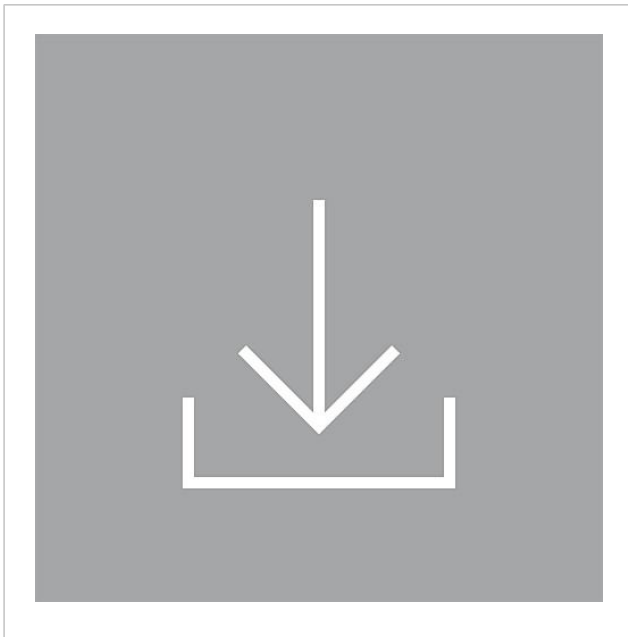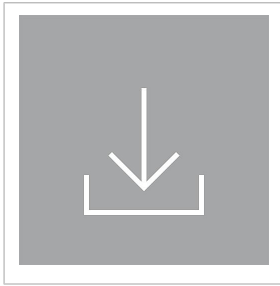



Bus software in-house  
telephone  
BSHT 650-0

Page 3

---

BSHT 650-0 Bus software in-house telephone v. 1.15.1	Software	53,6 MB	<a href="#">Download</a>
BSHT 650-0 Bus software in-house telephone v. 1.14.0		53,6 MB	<a href="#">Download</a>
	Additional information	109 kB	<a href="#">Download</a>