


Switching-/remote  
controller  
SFC 602-0

200015375-00

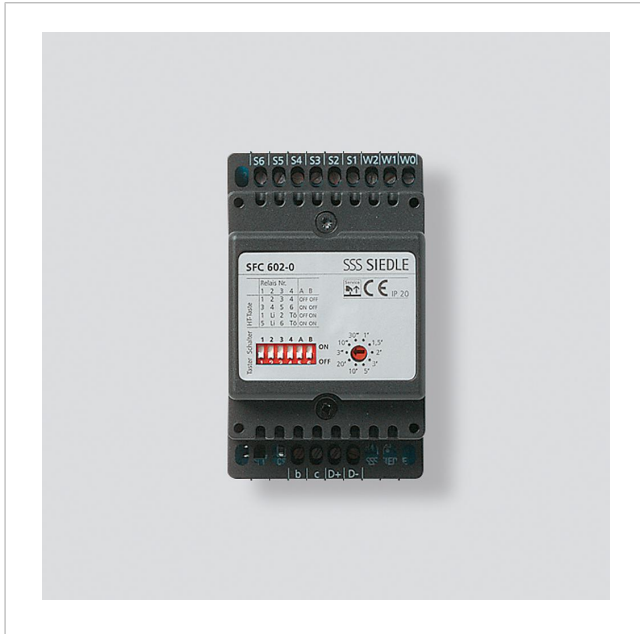

## Product description

Switching/remote controller in switch panel housing for execution of max. 4 central switching/control functions (connection to DL) or 4 local switching/control functions (connection GC 612-... or door loudspeaker of the ETC 602-...).

1 relay with changeover contact and 3 relays with 1 working contact each. Actuation takes place from buttons 1-5, light and door release of the HTC 811-... From the HTS 811-..., only the light and door release buttons can be used. Function of buttons 1-5 can be set via DIL switches as switches or buttons. For use as timer, e.g. to trigger a heavy current relay for staircase lighting. Connection facility to ETC 602-..., GC 612-..., TLE 061-... and TLM 612-...

## Specifications

Operating voltage:	12 V AC
Operating current:	max. 250 mA
Contact type:	1 changeover switch 24 V, 2 A; 3 n.o. contacts 24 V, 2 A
Switching time:	2 x adjustable from 3 sec to 20 min and 2 x fixed at 3 sec
Horizontal pitch (HP):	3
Dimensions (mm) W x H x D:	53.5 x 89 x 60

## Article information

Article designation	Article description	Colour	KG SAP article no.
SFC 602-0	Switching-/remote controller	Black	A 200015375-00

Switching-/remote  
controller  
SFC 602-0

200015375

Page 2





Switching-/remote  
controller  
SFC 602-0

200015375

Page 3

---

SFC 602-0 Switching / remote controller

SFC 602-...

Product information

430 kB

[Download](#)

Declaration of Conformity

13 kB

[Download](#)

Additional information

420 kB

[Download](#)