


Group controller
GC 612-0

200022390-00

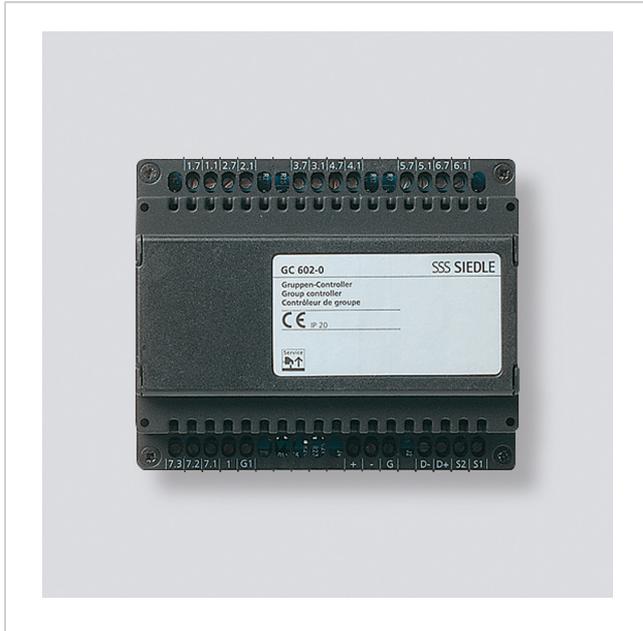

Product description

Group controller in switch panel housing for internal speech operation, for connection of max. 6 in-house telephones HTC 811-... and speech connection to the door loudspeaker. Door calls can be selectively assigned.

Specifications

Operating voltage:	24 V DC
Operating current:	max. 300 mA
Contact type:	contact 24 V, 2 A
Ambient temperature:	0 °C to +40 °C
Protection system:	IP 20
Horizontal pitch (HP):	6
Dimensions (mm) W x H x D:	107 x 89 x 60

Article information

Article designation	Article description	Colour/Material	KG SAP article no.
GC 612-0	Group controller	Black	A 200022390-00

Group controller
GC 612-0

200022390

Page 2





Group controller
GC 612-0

200022390

Page 3

GC 612-... Group Controller

GC 612-...

Product information

315 kB

[Download](#)

Declaration of Conformity

141 kB

[Download](#)

Additional information

140 kB

[Download](#)