


Secondary signal unit
NS 711-01

200031521-00

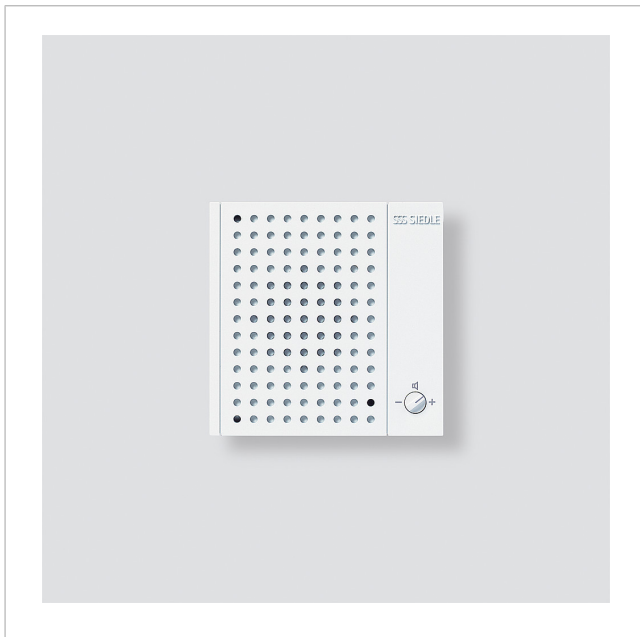

Product description

Secondary signal unit in a low-profile surface-mounting design with loudspeaker, externally adjustable volume control and electronic call generator.

Can be connected to HTS/HTC 811-... Call tones: Door call, 3-tone call signal (without G connection) or chime (with terminal G), storey call, 2-tone call signal. Call volume up to max. 86 dB(A)

Specifications

Protection system:	IP 20
Dimensions (mm) W x H x D:	107 x 107 x 25

Article information

Article designation	Article description	Colour	KG	SAP article no.
NS 711-01	Secondary signal unit	White	A	200031521-00



Spare parts


Article designation	Article description	Colour	KG	SAP article no.
TLM 611/612/645- TLE 051-02, TLE 061-0, BTLM 650-	Loudspeaker	Others	E	200029074-00

Secondary signal unit
NS 711-01

200031521

Page 2

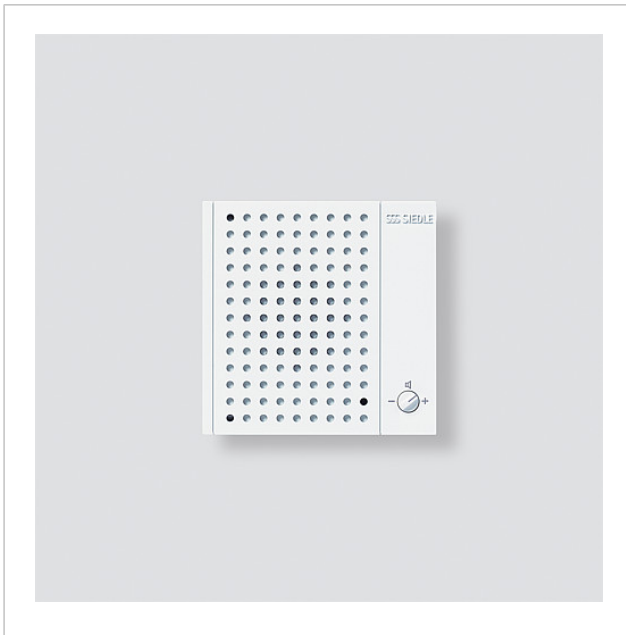



Secondary signal unit
NS 711-01

200031521

Page 3

NS 711-01 Auxiliary signalling unit

Product information

401 kB

[Download](#)

Declaration of Conformity

563 kB

[Download](#)

Additional information

420 kB

[Download](#)