


Light pedestal
LS 604-1 SM
200038147-00

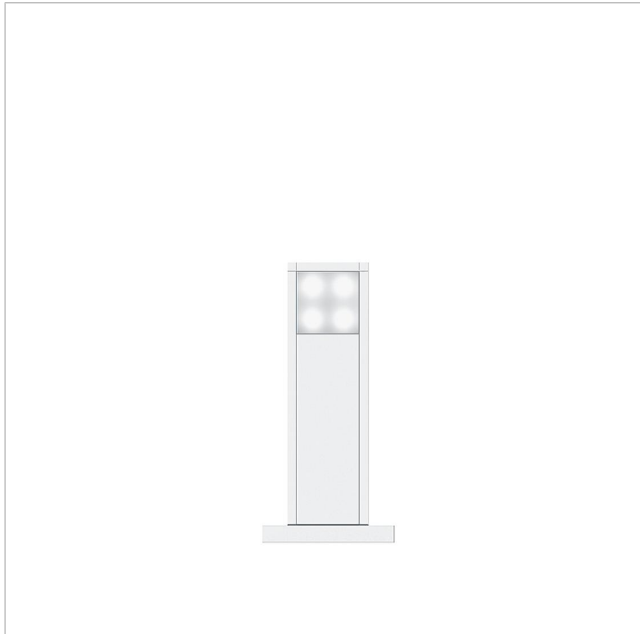

Product description

Light pedestal in extruded aluminium sheath, powder-coated/paintwork finish with ground flange, including mounting frame and one enclosed LEDM 600-... unit.

Specifications

| | |
|--------------------------------|------------------|
| Operating current: | max. 150 mA |
| Operating voltage: | 20–30 V DC |
| Protection system: | IP 54 |
| Ambient temperature: | –20 °C to +55 °C |
| Profile dimensions (mm) W x H: | 131 x 50 |
| Dimensions (mm) W x H x D: | 211 x 444 x 130 |

Article information

| Article designation | Article description | Colour/Material | KG SAP article no. |
|---------------------|---------------------|-----------------|--------------------|
| LS 604-1 SM | Light pedestal | Silver metallic | D 200038147-00 |

Accessories

| Article designation | Article description | Colour/Material | KG | SAP article no. |
|---------------------|---------------------|-----------------|----|-----------------|
| Vario 611 SM | Touch-up applicator | Silver metallic | 0 | 210007117-00 |

Light pedestal
LS 604-1 SM

200038147

Page 2



Light pedestal
LS 604-1 SM

200038147

Page 3



| | | | |
|--|---------------------------|--------|----------|
| KSF/KS 613-.../616-... LS 604-.../608-... Communication pedestal Light pedestal | Product information | 850 kB | Download |
| LS 604-... | Declaration of Conformity | 30 kB | Download |
| | Additional information | 109 kB | Download |