


Light pedestal
LS 604-1 DG
200038153-00

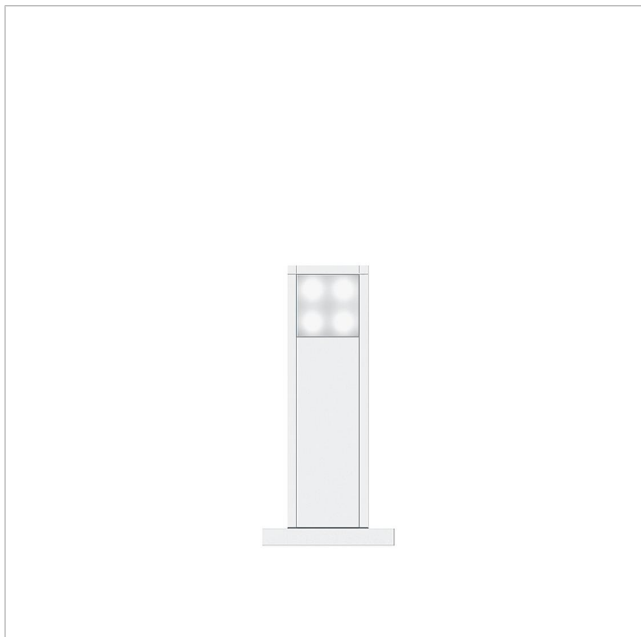

Product description

Light pedestal in extruded aluminium sheath, powder-coated/paintwork finish with ground flange, including mounting frame and one enclosed LEDM 600-... unit.

Specifications

Operating current:	max. 150 mA
Operating voltage:	20–30 V DC
Protection system:	IP 54
Ambient temperature:	–20 °C to +55 °C
Profile dimensions (mm) W x H:	131 x 50
Dimensions (mm) W x H x D:	211 x 444 x 130

Article information

Article designation	Article description	Colour/Material	KG SAP article no.
LS 604-1 DG	Light pedestal	Micaceous dark grey	D 200038153-00

Accessories

Article designation	Article description	Colour/Material	KG	SAP article no.
Vario 611 DG	Touch-up applicator	Micaceous dark grey	0	210007123-00

Light pedestal
LS 604-1 DG

200038153

Page 2



Light pedestal
LS 604-1 DG

200038153

Page 3



KSF/KS 613-.../616-... LS 604-.../608-... Communication pedestal	Product information	850 kB	Download
Light pedestal			
LS 604-...	Declaration of Conformity	30 kB	Download
	Additional information	109 kB	Download