

Light pedestal  
LS 608-2 DG

200038169-00

## Product description

Light pedestal in extruded aluminium sheath, powder-coated/paintwork finish with ground flange, including mounting frame and two enclosed LEDM 600-... units.

## Specifications

Operating current:	max. 300 mA
Operating voltage:	20–30 V DC
Protection system:	IP 54
Ambient temperature:	–20 °C to +55 °C
Profile dimensions (mm) W x H:	131 x 50
Dimensions (mm) W x H x D:	211 x 844 x 130

## Article information

Article designation	Article description	Colour/Material	KG SAP article no.
LS 608-2 DG	Light pedestal	Micaceous dark grey	D 200038169-00


## Accessories

Article designation	Article description	Colour/Material	KG	SAP article no.
Vario 611 DG	Touch-up applicator	Micaceous dark grey	0	210007123-00

Light pedestal  
LS 608-2 DG

200038169

Page 2

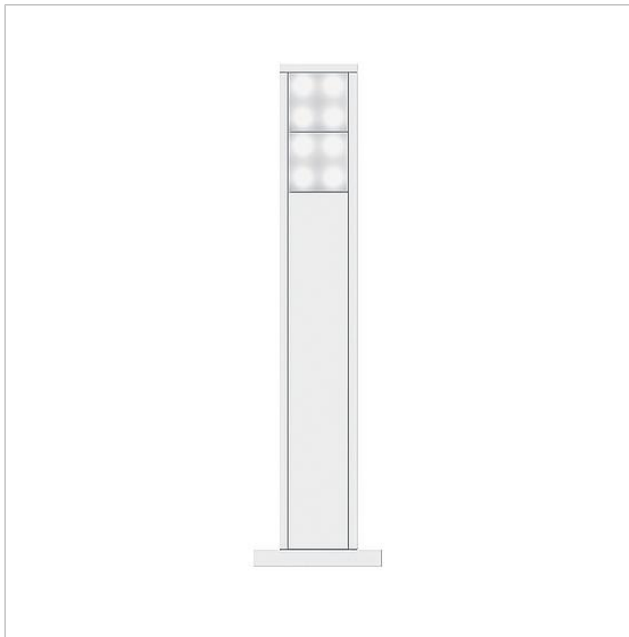



Light pedestal  
LS 608-2 DG

200038169

Page 3

---

KSF/KS 613-.../616-... LS 604-.../608-... Communication pedestal	Product information	850 kB	Download
Light pedestal			
LS 608-...	Declaration of Conformity	30 kB	Download
	Additional information	109 kB	Download