



Siedle Classic door station audio
CL 111-3 R-02
200042893-00

Product description

Classic door station for the 6+n system with stainless steel front, brushed V4A. Only for mounting on existing flush-mount housing "size B" of series TL 111.

Components:

- CTLE 051-... door loudspeaker with integrated loudspeaker and microphone, voice volume can be adjusted
- 3 call buttons with backlit nameplate, exchangeable from the front

Specifications

Ambient temperature:	-20 °C to +55 °C
Dimensions front panel (mm) W x H x D:	171 x 277 x 2

Article information

Article designation	Article description	Colour/Material	KGSAP article no.
CL 111-3 R-02	Siedle Classic door station audio	Brushed stainless steel	D 200042893-00

Accessories

Article designation	Article description	Colour/Material	KG	SAP article no.
HTA 811-0 W	Analogue in-house telephone	White	C	200039976-00
NG 402-03	Line rectifier	Black	A	200033590-00
ZNSM/CL-02	Metal Classic accessory nameplate	Others	D	200043063-00

Spare parts

Article designation	Article description	Colour/Material	KG	SAP article no.
CL 02 Siedle Classic	Complete button without circuit board	Others	E	200044537-00
CL 02 Siedle Classic	Nameplate upper part call button	Clear glass	E	200029966-00
CL 02-1 Siedle Classic	Button circuit board	Others	E	200044533-00
CL 02-2 Siedle Classic	Button circuit board	Others	E	200044534-00



Siedle Classic door
station audio
CL 111-3 R-02

200042893

Page 2


Article designation	Article description	Colour/Material	KG	SAP article no.
CL 02-3 Siedle Classic	Button circuit board	Others	E	200044535-00
TL 111/411-...	Bit for Portavox dual-hole screws	Others	E	210007473-01



Siedle Classic door
station audio
CL 111-3 R-02

200042893

Page 3

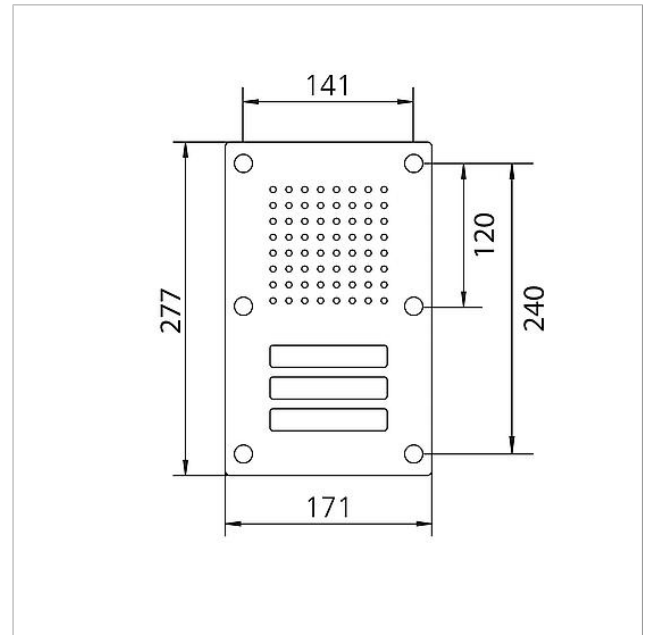



Siedle Classic door
station audio
CL 111-3 R-02

200042893

Page 4

CL 111-1...6 R-02 & CL 411 BD2A 01...03 R Classic door station	Product information	1,2 MB	Download
CTLE 051-02 Door loudspeaker 6+n	Product information	468 kB	Download
Siedle Classic -02	Declaration of Conformity	7,7 MB	Download
	Additional information	140 kB	Download