

Smart Gateway
Professional
SG 650-0

200048807-00



Product description

Smart Gateway Professional: top hat rail device for private or professional use with connection of up to 50 IP users.

Specifications

Operating voltage:	20–50 V DC, PoE in accordance with 802.3af
Operating current:	max. 400 mA
Protection system:	IP 20
Ambient temperature:	0 °C to +40 °C
Horizontal pitch (HP):	6
Dimensions (mm) W x H x D:	107 x 109 x 60

Article information

Article designation	Article description	Colour/Material	KG SAP article no.
SG 650-0	Smart Gateway Professional	Black	D 200048807-00



Accessories


Article designation	Article description	Colour/Material	KG	SAP article no.
BLC 250-0	Bus licence client	Others	S	200048823-00
BLT 250-0	Bus licence for telephony connection	Others	S	210006329-00
BLT 251-0	Bus licence for telephony connection	Others	S	210008136-00

Smart Gateway
Professional
SG 650-0

200048807

Page 2

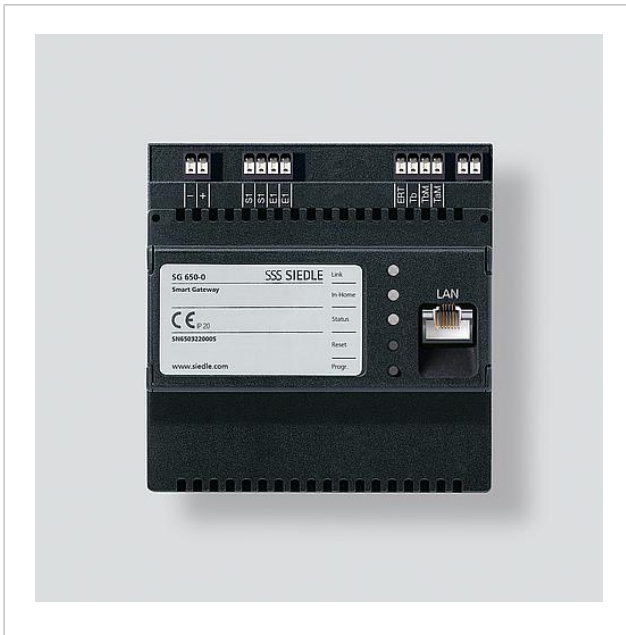



Smart Gateway
Professional
SG 650-0

200048807

Page 3

		173 kB	Download
		4 MB	Download
SG 650-0 Firmware V. 1.6.5	Firmware	482 MB	Download
	Commissioning instruction	971 kB	Download
SG 650-0 Smart Gateway	Product information	974 kB	Download
	Additional information	242 kB	Download
SG 650-0 Smart Gateway Professional	Declaration of Conformity	1,5 MB	Download
Siedle Finder SG 150/650-...	Software	21,9 MB	Download
	Additional information	140 kB	Download