


Status display module
ZAM 670-0 DG
200087925-00

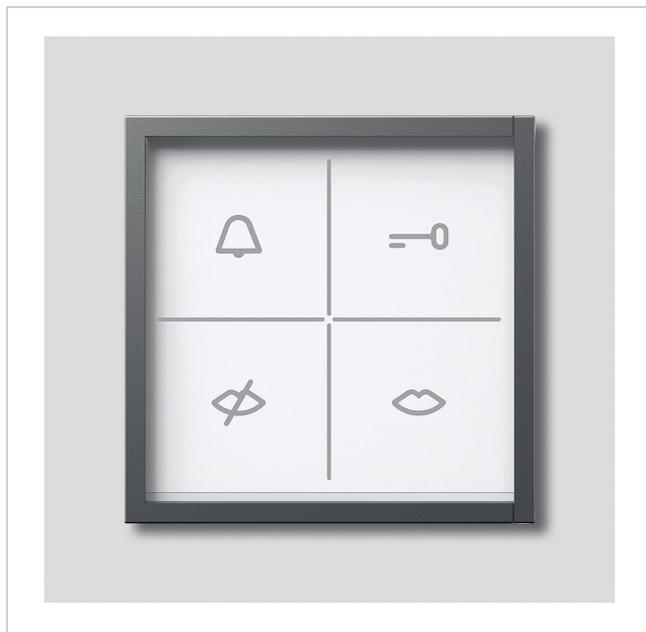

Product description

Status display module with visual and acoustic feedback. Four backlit LED symbols signal the different statuses: "Call", "Not available", "Speech" and "Door release".
For use in Siedle Siedle Access Professional intercom system.

Specifications

Operating voltage:	12 V AC, 15–32 V DC
Operating current:	70 mA
Protection system:	IP 54
Ambient temperature:	–20 °C to +55 °C
Dimensions (mm) W x H x D:	99 x 99 x 26

Article information

Article designation	Article description	Colour/Material	KG SAP article no.
ZAM 670-0 DG	Status display module	Micaceous dark grey	F 200087925-00

Accessories

Article designation	Article description	Colour/Material	KG	SAP article no.
Vario 611 DG	Touch-up applicator	Micaceous dark grey	0	210007123-00



Spare parts

Article designation	Article description	Colour/Material	KG	SAP article no.
Vario 611	Sealing frame modules	Grey	E	210007484-00
ZAM 670-...	Terminal block	Black	E	210010990-00


Status display module
ZAM 670-0 DG

200087925

Page 2



Zustandsanzeige-Modul
ZAM 611
M = 1:1, 01.02.2012 rw.
Siedle-Design
Eberhard Meurer



Status display module
ZAM 670-0 DG

200087925

Page 3

ZAM 600-01, ZAM 670-0 Status display module

ZAM 670-0 Status display module

Product information

792 kB

[Download](#)

Declaration of Conformity

814 kB

[Download](#)

Additional information

140 kB

[Download](#)