

Smart Gateway
SG 150-0

210007449-00



Product description

Smart Gateway: top hat rail device for private or professional use for smaller systems (up to 10 IP users).

Specifications

Operating voltage:	20–50 V DC, PoE in accordance with 802.3af
Operating current:	max. 400 mA
Protection system:	IP 20
Ambient temperature:	0 °C to +40 °C
Horizontal pitch (HP):	6
Dimensions (mm) W x H x D:	107 x 109 x 60

Article information

Article designation	Article description	Colour	KG	SAP article no.
SG 150-0	Smart Gateway	Black	D	210007449-00



Accessories


Article designation	Article description	Colour	KG	SAP article no.
BLC 250-0	Bus licence client	Others	S	200048823-00
BLF 250-0	Bus licence for external device	Others	S	210009283-00
BLSHT 250-0	Bus license software in-house telephone	Others	S	210009282-00
BLT 250-0	Bus licence for telephony connection	Others	S	210006329-00
BLT 251-0	Bus licence for telephony connection	Others	S	210008136-00

Smart Gateway
SG 150-0

210007449

Page 2

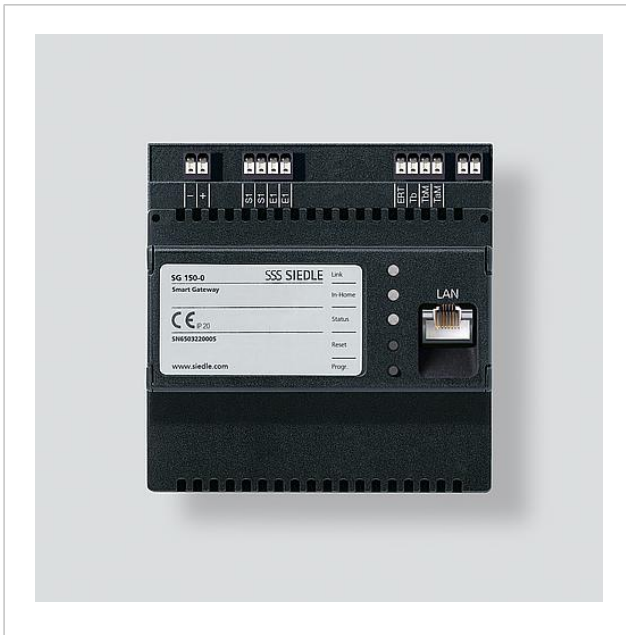



Smart Gateway
SG 150-0

210007449

Page 3

SG 150-0 Smart Gateway	Product information	561 kB	Download
SG 150-0 Smart Gateway	Declaration of Conformity	759 kB	Download
	Commissioning instruction	1,1 MB	Download
	Additional information	260 kB	Download
	Additional information	420 kB	Download
SG 150-0 Release Notes V. 2.0.1 (DE/EN)	Release Notes	198 kB	Download
SG 150-0 Release Notes V. 2.0.3 (DE/EN)	Release Notes	178 kB	Download
	Release Notes	245 kB	Download
	Firmware	292 MB	Download
	Firmware	342 MB	Download
Siedle Finder SG 150/650-...	Software	21,9 MB	Download