

Function unit audio
door station Siedle
Classic
F CL A 05 B-0
210007710-00

Product description

Classic door station for the In-Home bus with stainless steel front, brushed V4A. The GU CL 05-0 flush-mount housing is required for flush mounting.

Components:

- CBTLE 050-... door loudspeaker with integrated loudspeaker and microphone, voice volume can be adjusted
- 5 call buttons with backlit nameplate, exchangeable from the front, acoustic feedback when pressing a call button can be activated

Specifications

Ambient temperature: -20 °C to +55 °C
Dimensions front panel (mm) W x H x D: 171 x 329 x 2

Article information


Article designation	Article description	Colour	KGAP article no.
F CL A 05 B-0	Function unit audio door station Siedle Classic	Brushed stainless steel	D 210007710-00

Accessories

Article designation	Article description	Colour	KG	SAP article no.
GU CL 05-0	Flush-mount housing Siedle Classic	Hot-dip galvanized sheet steel	D	210007735-00
ZDS/CL	Pilfer safeguard	Black	D	200034998-00
ZNSM/CL-02	Metal Classic accessory nameplate	Others	D	200043063-00

Spare parts

Article designation	Article description	Colour	KG	SAP article no.
CL 02 Siedle Classic	Nameplate upper part call button	Clear glass	E	200029966-00
CL 02 Siedle Classic	Complete button without circuit board	Others	E	200044537-00




Function unit audio
door station Siedle
Classic
F CL A 05 B-0

210007710

Page 2


Article designation	Article description	Colour	KG	SAP article no.
CL 02-2 Siedle Classic	Button circuit board	Others	E	200044534-00
CL 02-3 Siedle Classic	Button circuit board	Others	E	200044535-00




Function unit audio
door station Siedle
Classic
F CL A 05 B-0

210007710

Page 3

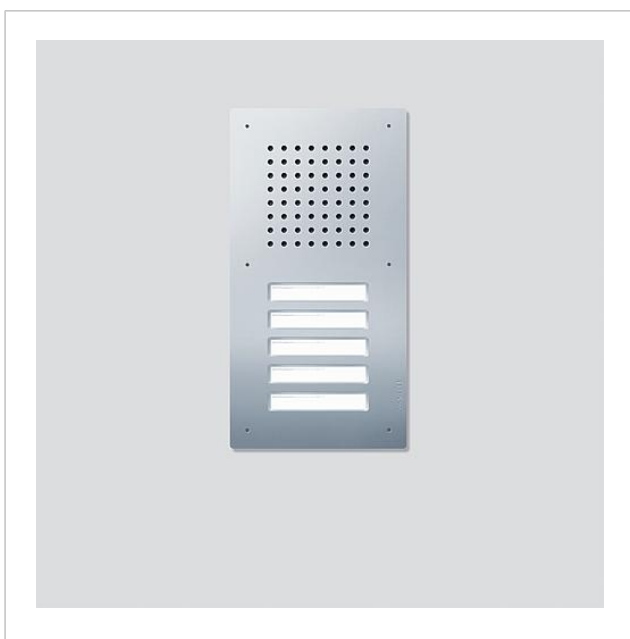



Function unit audio
door station Siedle
Classic
F CL A 05 B-0

210007710

Page 4

Siedle Classic Installation instructions	Product information	1,4 MB	Download
CBTLE 051-05 Bus custom-fit door loudspeaker	Product information	521 kB	Download
F CL.... Siedle Classic	Declaration of Conformity	8,1 MB	Download
	Additional information	420 kB	Download