

Siedle Compact video door station flush mounting
CVU 850-2-0 E
210009488-00

Product description

Siedle Compact video door station flush mounting in bus technology, for installation in the In-Home bus. With the functions calling, speech, vision and door release.

Performance features:

- Integrated camera with automatic day/night switchover, LED lighting and 2-stage heating
- Integrated door loudspeaker
- Adjustable voice volume
- Number of integrated call buttons: 2
- Acoustic button acknowledgement can be activated
- Backlit nameplates exchangeable from the front
- For flush mounting with brushed stainless steel panel

Specifications


Contact type:	contact 24 V, 2 A
Protection system:	IP 54, IK 8
Ambient temperature:	-20 °C to +40 °C
Dimensions front panel (mm) W x H x D:	110 x 273 x 1
Dimensions housing (mm) W x H x D:	85 x 253 x 48

Article information

Article designation	Article description	Colour/Material	KGAP article no.
CVU 850-2-0 E	Siedle Compact video door station flush mounting	Brushed stainless steel	D 210009488-00

Spare parts

Article designation	Article description	Colour/Material	KG	SAP article no.
CA 812-..., BCV/BCVU/CA/CAU/CV/CVU/ STA/STV 850-...	Loudspeaker	Others	E	200029867-00
CA 812-..., CA/CAU/CVU 850-..., CV 850-x-03, -04	Microphone	Others	E	200029868-00
CA 812-..., CA/CV 850-..., BCV 850-...	Siedle screw-turner	Others	E	200029931-00
CA 812-2, CA/CAU 850-2, CV/CVU 850-2-...	Nameplate superstructure	Clear glass	E	200029865-00

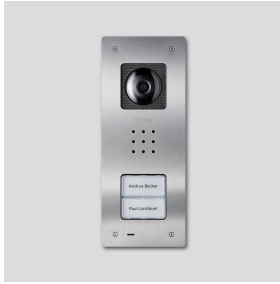

Siedle Compact video
door station flush
mounting
CVU 850-2-0 E

210009488

Page 2

Article designation

CA 812-2, CA/CAU 850-2, CV/CVU
850-2-...

Article description

Nameplate insert

Colour/Material

White

KG

E

**SAP article
no.**




200029870-00




Siedle Compact video
door station flush
mounting
CVU 850-2-0 E

210009488

Page 3

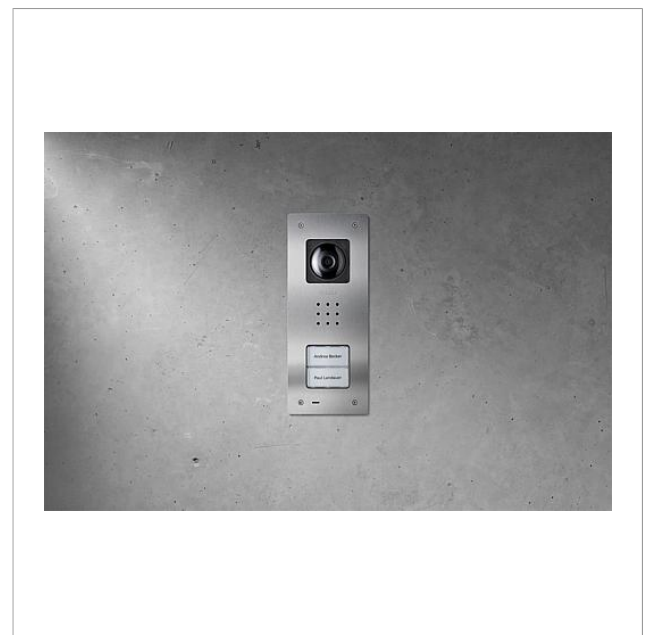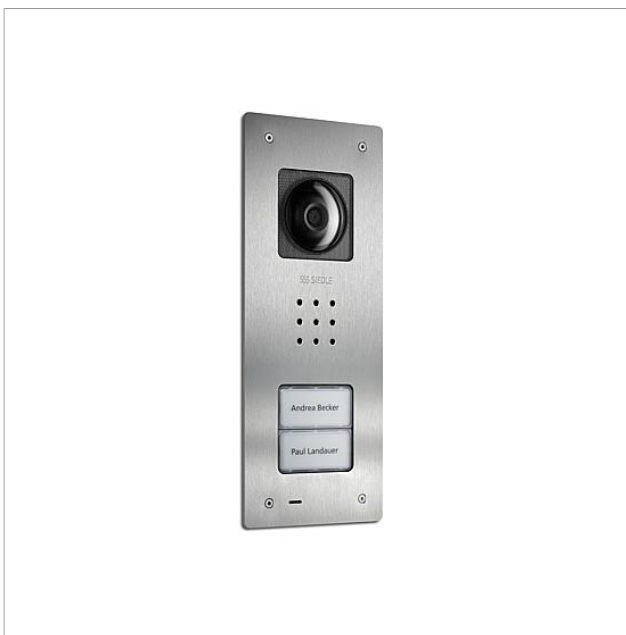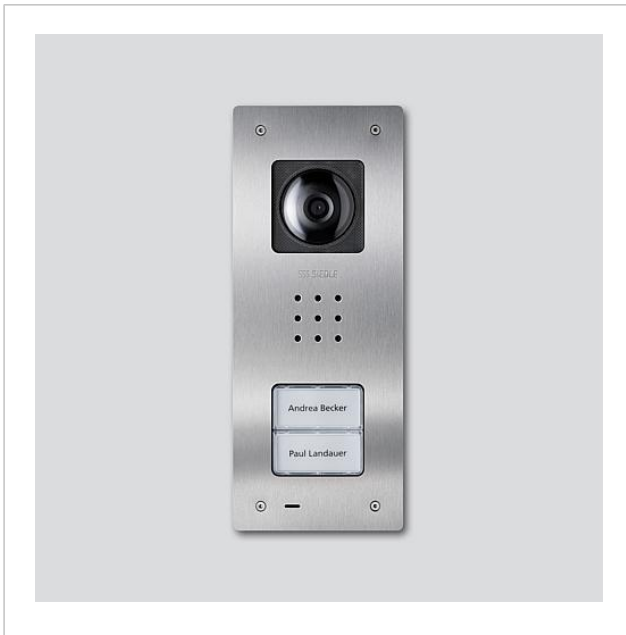

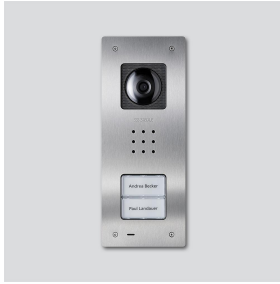

Siedle Compact video
door station flush
mounting
CVU 850-2-0 E

210009488

Page 4

CVU 850-x-0 E Siedle Compact video door station flush
mounting

Product information

1,5 MB

[Download](#)

Declaration of Conformity

140 kB

[Download](#)

Additional information

140 kB

[Download](#)