

Access door  
loudspeaker for Siedle  
Vario  
ATLM 770-0 W  
210011520-00

## Product description

Access door loudspeaker for Siedle Vario with integrated loudspeaker and microphone. Easy cabling thanks to pre-assembled, plug-in cable connection.

### Performance features:

- LAN interface: RJ-45, 10/100 Mbits
- Front grille made of weather and UV-resistant polycarbonate
- Loudspeaker, voice volume can be adjusted
- Durable electret microphone, microphone sensitivity can be adjusted
- Audio codec: G.722
- Button acknowledgement tone
- Nameplate illumination of the call buttons can be controlled (time controlled or demand-driven)

## Specifications

Operating voltage:	PoE in accordance with 802.3af
Ambient temperature:	-20 °C to +55 °C
Protection system:	IP 54, IK 09
Height of structure (mm):	1.4
Dimensions (mm) W x H x D:	99 x 99 x 33


## Article information

Article designation	Article description	Colour	KG	KGSAF article no.
ATLM 770-0 W	Access door loudspeaker for Siedle Vario	White	F	210011520-00

## Accessories

Article designation	Article description	Colour	KG	SAP article no.
Vario 611 W	Touch-up applicator	White	0	210007116-00

## Spare parts



Access door  
loudspeaker for Siedle  
Vario  
ATLM 770-0 W

210011520

Page 2

**Article designation**

Vario 611

**Article description**

Sealing frame modules

**Colour**

Grey

**KG**

E

**SAP article  
no.**


210007484-00




Access door  
loudspeaker for Siedle  
Vario  
ATLM 770-0 W

210011520

Page 3

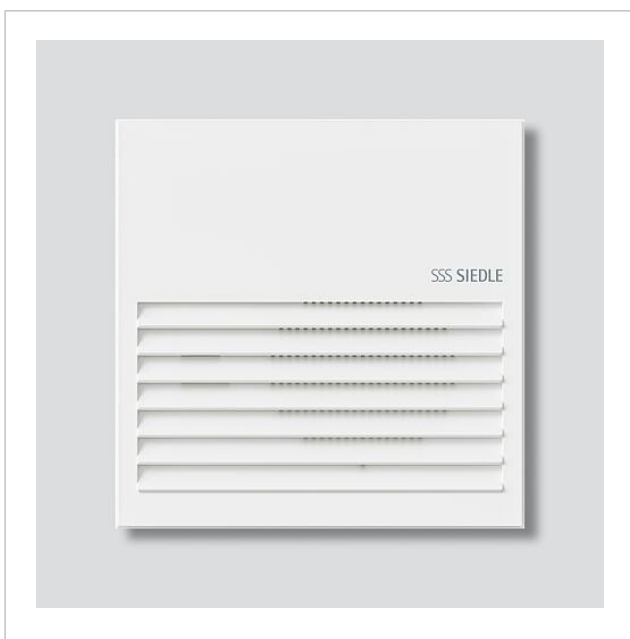



Access door  
loudspeaker for Siedle  
Vario  
ATLM 770-0 W

210011520

Page 4

---

ATLM 770-0 Access door loudspeaker for Siedle Vario  
ATLM 770-0

Product information	797 kB	<a href="#">Download</a>
Declaration of Conformity	345 kB	<a href="#">Download</a>
Commissioning instruction	2,2 MB	<a href="#">Download</a>
Additional information	420 kB	<a href="#">Download</a>
Commissioning instruction	2 MB	<a href="#">Download</a>
System manual	8,1 MB	<a href="#">Download</a>