


Bus custom-fit door  
loudspeaker Plus  
BTLEP 050-0

210012294-00

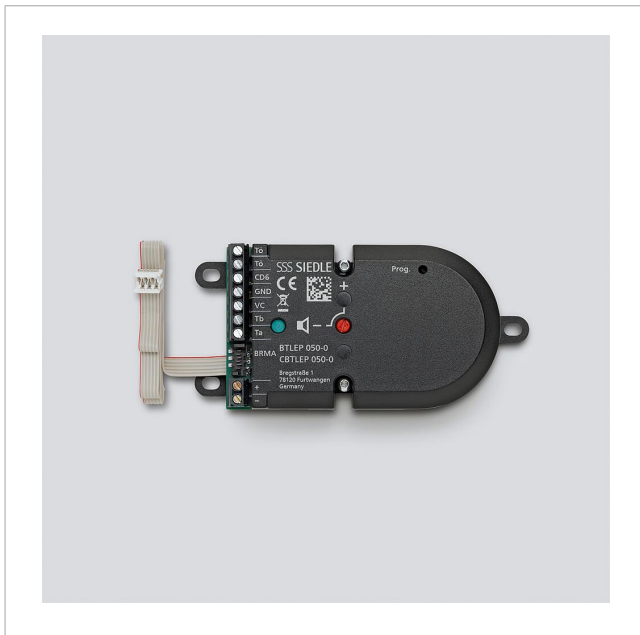

## Product description

Bus custom-fit door loudspeaker Plus for installation in the customer's intercom compartments, door constructions, letterboxes, etc.

Up to 12 call buttons provided by the customer can be directly connected to the BRMA 050-... bus call button matrix.

### BTLEP 050-... performance features

- Loudspeaker, voice volume can be adjusted
- The voice volume can be doubled thanks to the audio amplifier (with additional supply)
- Durable electret microphone
- Potential-free work contact for door release, can be controlled without additional wiring via existing bus line
- Integrated camera control
- A ZAM 600-... status display module can be connected for optical and acoustic signalling of the operating state
- Universal fastening options, when used with the ZJ 051-... grille, it can be screwed onto this directly

## Specifications

Contact type:	Contact 15 V AC, 30 V DC, 2 A
Switching time:	3 sec
Additional supply:	22-32 V DC
Protection system:	Dependent on the mounting conditions
Dimensions (mm) W x H x D:	124 x 60 x 31
Dimensions housing (mm) W x H x D:	100 x 60 x 31



Bus custom-fit door  
loudspeaker Plus  
BTLEP 050-0

210012294

Page 2





Bus custom-fit door  
loudspeaker Plus  
BTLEP 050-0

210012294

Page 3

---

BTLEP 051-0/BTLEP 050-0 Bus custom-fit door loudspeaker Plus with / without Bus call button matrix	Product information	779 kB	Download
BTLEP 050-...	Declaration of Conformity	354 kB	Download
	Additional information	420 kB	Download