

Bus custom-fit door
loudspeaker Plus incl.
Bus call button matrix
BTLEP 051-0

210012295-00

Product description

Bus custom-fit door loudspeaker Plus for installation in the customer's intercom compartments, door constructions, letterboxes, etc.


Up to 12 call buttons provided by the customer can be directly connected to the BRMA 050-... bus call button matrix.

BTLEP 050-... performance features

- Loudspeaker, voice volume can be adjusted
- The voice volume can be doubled thanks to the audio amplifier (with additional supply)
- Durable electret microphone
- Potential-free work contact for door release, can be controlled without additional wiring via existing bus line
- Integrated camera control
- A ZAM 600-... status display module can be connected for optical and acoustic signalling of the operating state
- Universal fastening options, when used with the ZJ 051-... grille, it can be screwed onto this directly

Specifications


Contact type:	Contact 15 V AC, 30 V DC, 2 A
Switching time:	3 sec
Additional supply:	22-32 V DC
Protection system:	Dependent on the mounting conditions
Dimensions (mm) W x H x D:	BTLEP 050-0 124 x 60 x 31, BRMA 050-01 53 x 100 x 17
Dimensions housing (mm) W x H x D:	100 x 60 x 31




Bus custom-fit door
loudspeaker Plus incl.
Bus call button matrix
BTLEP 051-0

210012295

Page 2

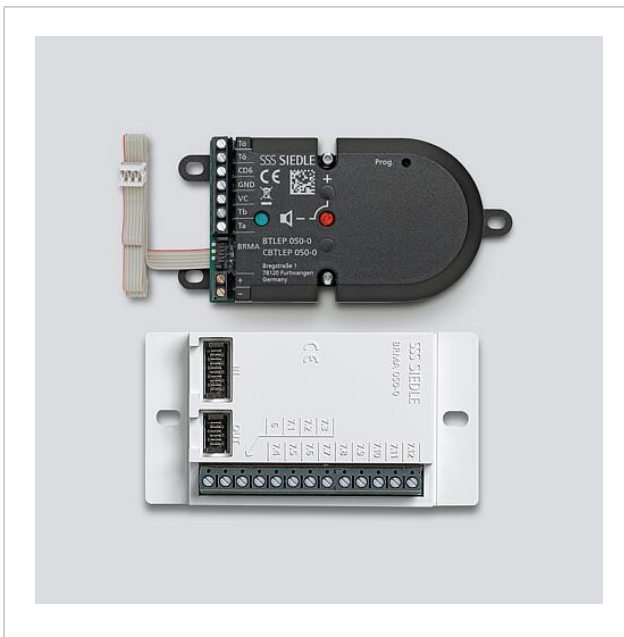



Bus custom-fit door
loudspeaker Plus incl.
Bus call button matrix
BTLEP 051-0

210012295

Page 3

BTLEP 051-0/BTLEP 050-0 Bus custom-fit door loudspeaker Plus
with / without Bus call button matrix

779 kB

[Download](#)

[Additional information](#)

140 kB

[Download](#)