SSS SIEDLE

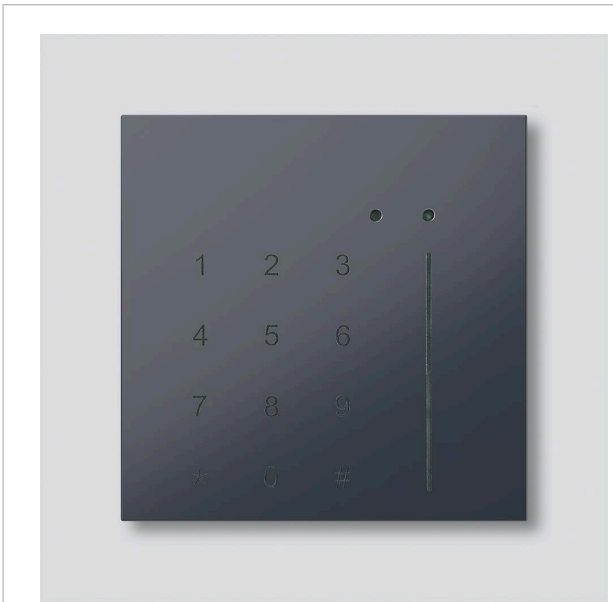

readID MIFARE for Siedle
SE 1045 DBKT AG

210013310-00

Product description

ReadID MIFARE for Siedle - powerful access control reader in Siedle Vario module housing with PIN pad for electronic keys and cards with MIFARE DESFire EV1, EV2 and EV3 technology. The integrated function LED provides clear visual feedback.
Compatible with electronic keys and cards EK/EKC 600-…. The ReadID MIFARE for Siedle is ideal for contactless opening of doors, gates and other access points.

Performance features:
• Operation with Secure Controller SC 600-…
• RS485 interface / OSDP protocol
• Capacitive touch PIN pad with white backlighting
• Tamper protection
• Ambient light sensor
• USB interface for firmware updates and OSDP configuration
Supported technologies:
• MIFARE Classic (UID / sector)
• MIFARE Ultralight (UID)
• MIFARE DESFire EV1 / EV2 / EV3 (UID / Application-AES)

Specifications

Operating voltage:	5–30 V DC
Operating current:	max. 50 mA
Protection system:	IP 54
Ambient temperature:	–30 °C to +70 °C
Dimensions (mm) W x H x D:	99 x 99 x 25



readID MIFARE for Siedle
SE 1045 DBKT AG

210013310