

Comfort bus telephone
BTC 850-02 E/W

200044608-00



Product description

Comfort bus telephone for Siedle In-Home bus.

With the functions calling, speech, door release, light, storey call, switching/control functions and internal communication.

Performance features:

- Hearing protection, audio privacy device integrated
- Muting and status display
- Parallel switching of 4 deluxe bus telephones (from the 3rd device, the PRI 602-... USB and ZBVG 650-... are required for programming)
- Call differentiation for storey call, 2 door calls and internal call
- Call generator with 11 call tone sequences, including chime
- Call volume adjustable in 5 stages up to max. 83 dB(A)
- Door release/light function at any time using bus cores
- Door connection possible at any time
- 8 display LEDs (e.g. door open)
- 8 function buttons, 7 freely configurable and capable of double assignment. Button functions can be freely assigned and actuated without additional installation via bus wires, e.g. for internal telephony
- Door call acceptance
- Doormatic
- Call forwarding
- Base plate with pre-installable terminals
- Parallel switching accessory ZPS 850-..., in order to connect a maximum of 4 additional bus telephones in parallel, retrofittable
- Interfacing relay accessory ZAR 850-... retrofittable
- Can be used with table-top accessory ZTC 800-... as a table-top device

Specifications

| | |
|----------------------------|-----------------|
| Operating voltage: | via In-Home bus |
| Ambient temperature: | +5 °C to +40 °C |
| Dimensions (mm) W x H x D: | 106 x 201 x 46 |

Article information

| Article designation | Article description | Colour/Material | KG SAP article no. |
|---------------------|-----------------------|-----------------------|--------------------|
| BTC 850-02 E/W | Comfort bus telephone | Stainless steel/white | C 200044608-00 |

Comfort bus telephone
BTC 850-02 E/W

200044608

Page 2



Accessories

| Article designation | Article description | Colour/Material | KG | SAP article no. |
|---------------------|---------------------------------|-----------------|----|-----------------|
| BFS/BFC 850-... | Terminals | Blue | E | 200029592-00 |
| BTC 850-... | Insert for button functions | White | E | 200029575-00 |
| HH 800-0 | Hearing aid-compatible receiver | White | E | 200087165-00 |
| ZAR 850-0 | Interfacing relay accessory | Others | C | 200035272-00 |
| ZPS 850-0 | Parallel switching accessory | Others | C | 200035273-00 |
| ZTC 800-0 W | Comfort table-top accessory | White | A | 200044473-00 |


Spare parts

| Article designation | Article description | Colour/Material | KG | SAP article no. |
|--|------------------------------|-----------------|----|-----------------|
| BTC 850-... | Insert for button functions | White | E | 200029575-00 |
| BTC/BTCV 850-..., HTC/HTCV 811-..., HT/HTV 840-... | Transparent cover | Clear glass | E | 200029578-00 |
| BTS/BTC/IQ BTS 850-... | Terminals | Blue | E | 200029590-00 |
| HT 811/840/850/870-... W | Receiver with no-tangle cord | White | E | 200029573-00 |

Comfort bus telephone
BTC 850-02 E/W

200044608

Page 3

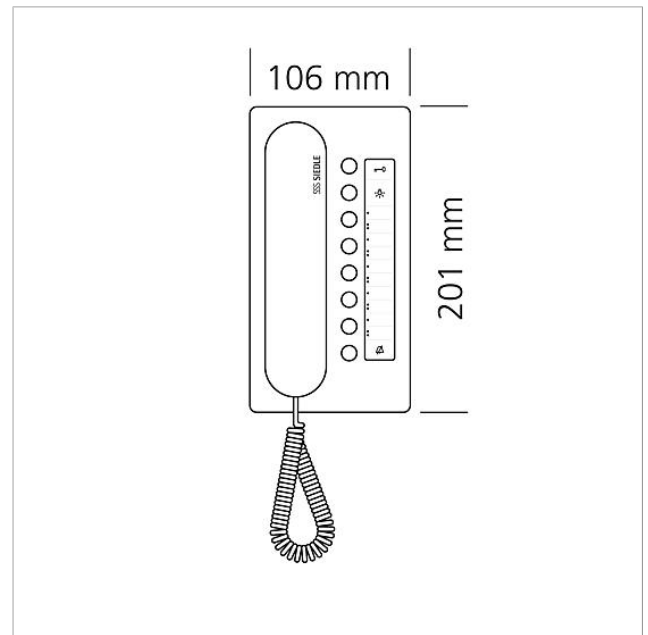



Comfort bus telephone
BTC 850-02 E/W

200044608

Page 4

BTC 850-02 Comfort bus telephone

Product information

923 kB

[Download](#)

BTC 850-02 Comfort bus telephone

Manual

507 kB

[Download](#)

Declaration of Conformity

770 kB

[Download](#)

Additional information

109 kB

[Download](#)

Labeling service

0 Bytes

[Download](#)