

Movement sensor  
module  
BMM 611-0 BG  
200038880-00

## Product description

Movement sensor module for Siedle Vario with photoelectric lighting controller and a horizontal pick-up angle of max. 180°.

Passive infrared detectors (PIR detectors) respond to changes in the incident infrared radiation. To detect motion, the moving object must radiate heat itself.

- Pick-up angle/pick-up width can be changed via aperture insert
- Photoelectric lighting controller range can be adjusted
- Switch-off delay can be set
- Photoelectric lighting controller and movement sensor module can be used individually or combined

## Specifications

Operating voltage:	12 V AC
Operating current:	max. 120 mA
Contact type:	contact 24 V, 2 A
Switching time:	5 sec to 15 min
Protection system:	IP 54
Ambient temperature:	-20 °C to +55 °C
Height of structure (mm):	25
Dimensions (mm) W x H x D:	99 x 99 x 51


## Article information

Article designation	Article description	Colour	KG SAP article no.
BMM 611-0 BG	Movement sensor module	Micaceous amber	D 200038880-00

## Accessories

Article designation	Article description	Colour	KG	SAP article no.
Vario 611 BG	Touch-up applicator	Micaceous amber	0	210007122-00

## Spare parts



Movement sensor  
module  
BMM 611-0 BG

200038880



Page 2


Article designation	Article description	Colour	KG	SAP article no.
BMM 611-...	Replacement panel for range reduction	Translucent	E	200031327-00
BMM 611-...	Terminal block	Black	E	200029976-00

Movement sensor  
module  
BMM 611-0 BG

200038880

Page 3

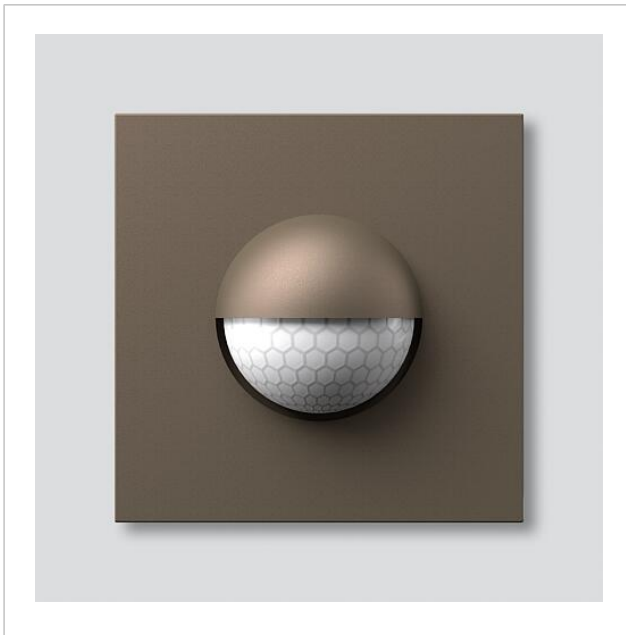



Movement sensor  
module  
BMM 611-0 BG

200038880

Page 4

---

BMM 611-0 Movement sensor module

Product information

871 kB

[Download](#)

Declaration of Conformity

4,4 MB

[Download](#)

Additional information

420 kB

[Download](#)